

# Quattroflow<sup>TM</sup> QF20kSU

Single-Use Pump for High Flow Rates

## The Single-Use Advantage

Quattroflow Single-Use pumps have a disposable product-wetted chamber constructed of solid polypropylene (PP) that can be replaced as a complete unit. The simple disposability of the pump chamber saves time and money by eliminating cleaning validation, sterilization and product cross-contamination. Single-Use pumps are critical to reduce equipment turnaround times in the development of biosimilar processes. In general, multi-product facilities are the typical field of application of the Single-Use pumps (e.g. process development, production of clinical reference samples, contract manufacturing).

## Single-Use Quaternary Diaphragm Pumps

The Quattroflow Single-Use pumps are self-priming and can be run dry. Inside the pump chamber, there are no rotating parts that are subject to friction that might cause particle generation and/or product modification/degradation due to heat generation. A Single-Use pump chamber can be replaced and ready for a new batch in a few minutes. An exchange kit is available to retrofit a Multi-Use pump into a Single-Use pump.

## Features & Benefits

- Assembled under controlled and clean conditions
- Gamma irradiation possible

**Flow rate:** 1,000 – 16,000 lph  
(16.7 – 267 lpm)

**Maximum pressure:** 4 bar (58 psi)

**Connections:** 2" TC, front


**Motor:** 400V, 3-phase

### Materials

- **Pump chamber:** Polypropylene
- **Valve plate:** Polypropylene
- **Diaphragms:** TPE
- **Valves:** EPDM, 316L
- **O-rings:** EPDM

**QF20kSU**  
Single-Use  
Quaternary Pumps

Developed  
for Higher Flow Rates  
in Single-Use  
Applications

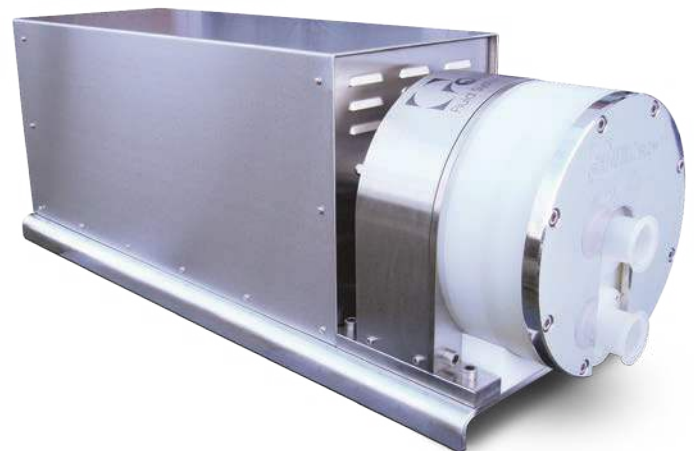

QF20kSU

ALMATEC Maschinenbau GmbH  
Hochstraße 150-152  
47228 Duisburg, Germany  
Tel: +49 (2065) 89205-0 • Fax: +49 (2065) 89205-40  
info@almatec.de  
[quattroflow.com](http://quattroflow.com)